


SPARK RESISTANT

- BRONZE WHEELS
- STAINLESS STEEL DROP STOPS
- ALUMINUM HAND CHAIN & HAND CHAIN GUARD

NO. REQ. 1

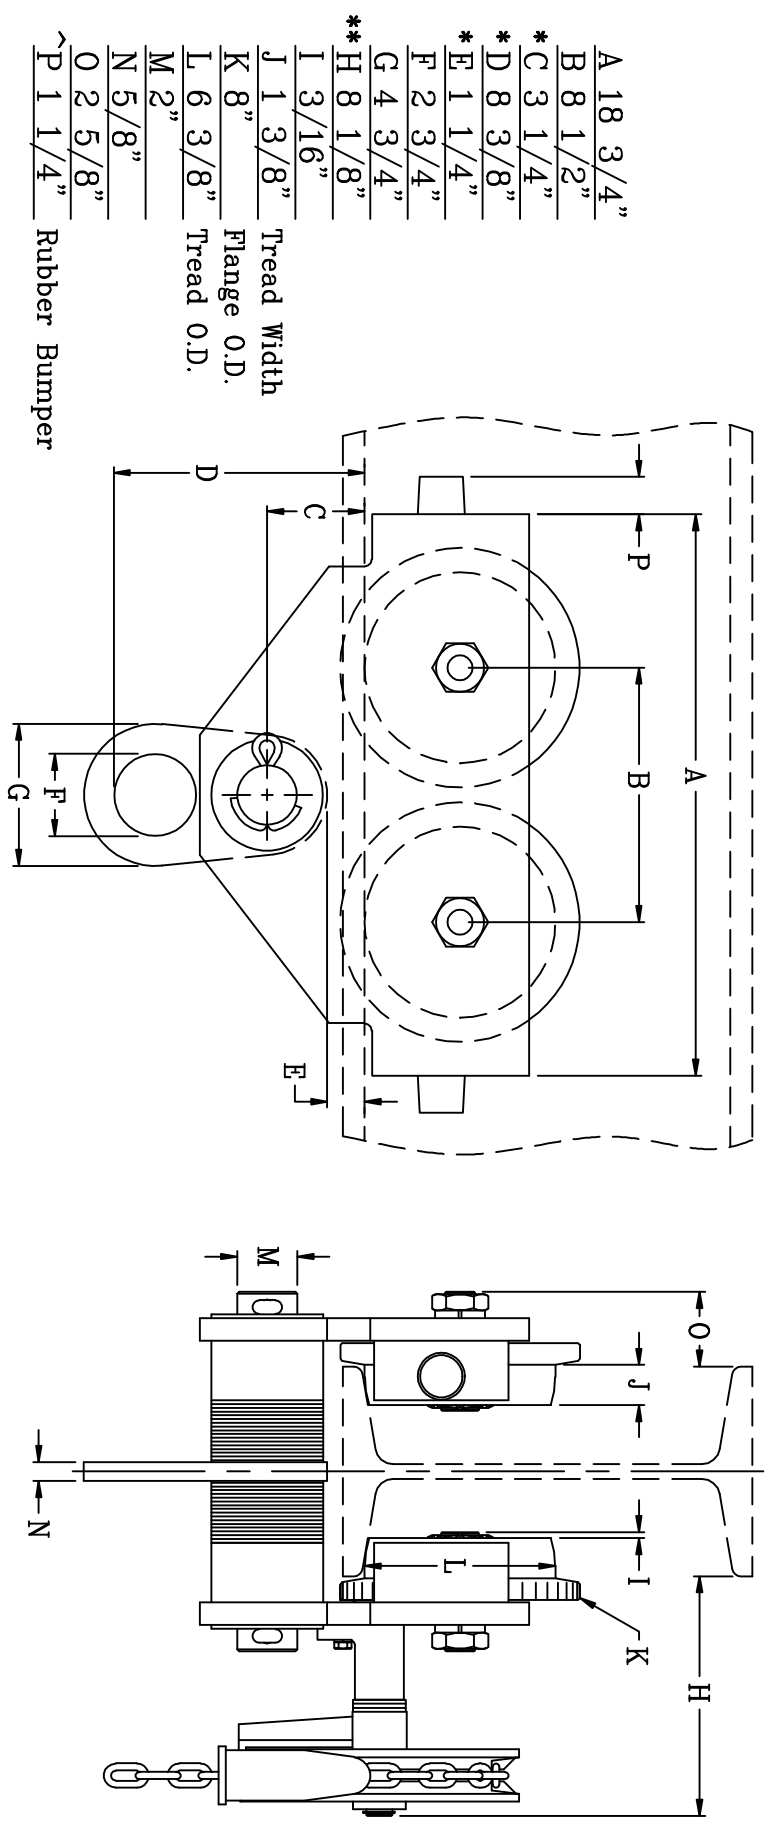

* To wheel running surface of beam.
 ** "H" applies to geared units only - For plain units "O" dimension is the same for both sides of trolley.
 ~ "P" applies only to units with removable rubber bumpers
 THIS UNIT IS ADJUSTABLE FROM 4"-7", MINIMUM BEAM HEIGHT: 8"
 CUSTOMER MUST TAKE INTO CONSIDERATION FLANGE WIDTH AND THICKNESS.

4 TON 1641/1642 TROLLEY

CHESTER HOIST

LISBON, OHIO

DR. MAM TR. CK. AP.

SCALE NONE DATE 3/2/09

REF. DWG. NO. 1600-4

Dwg. No. C-50047

REVISIONS CK-DATE